


# 12+10B

## CPL“君子龙” CD120+CD120B+CD120system


|    |     |
|----|-----|
| 1+ | LF+ |
| 1- | LF- |
| 2+ | HF+ |
| 2- | HF- |

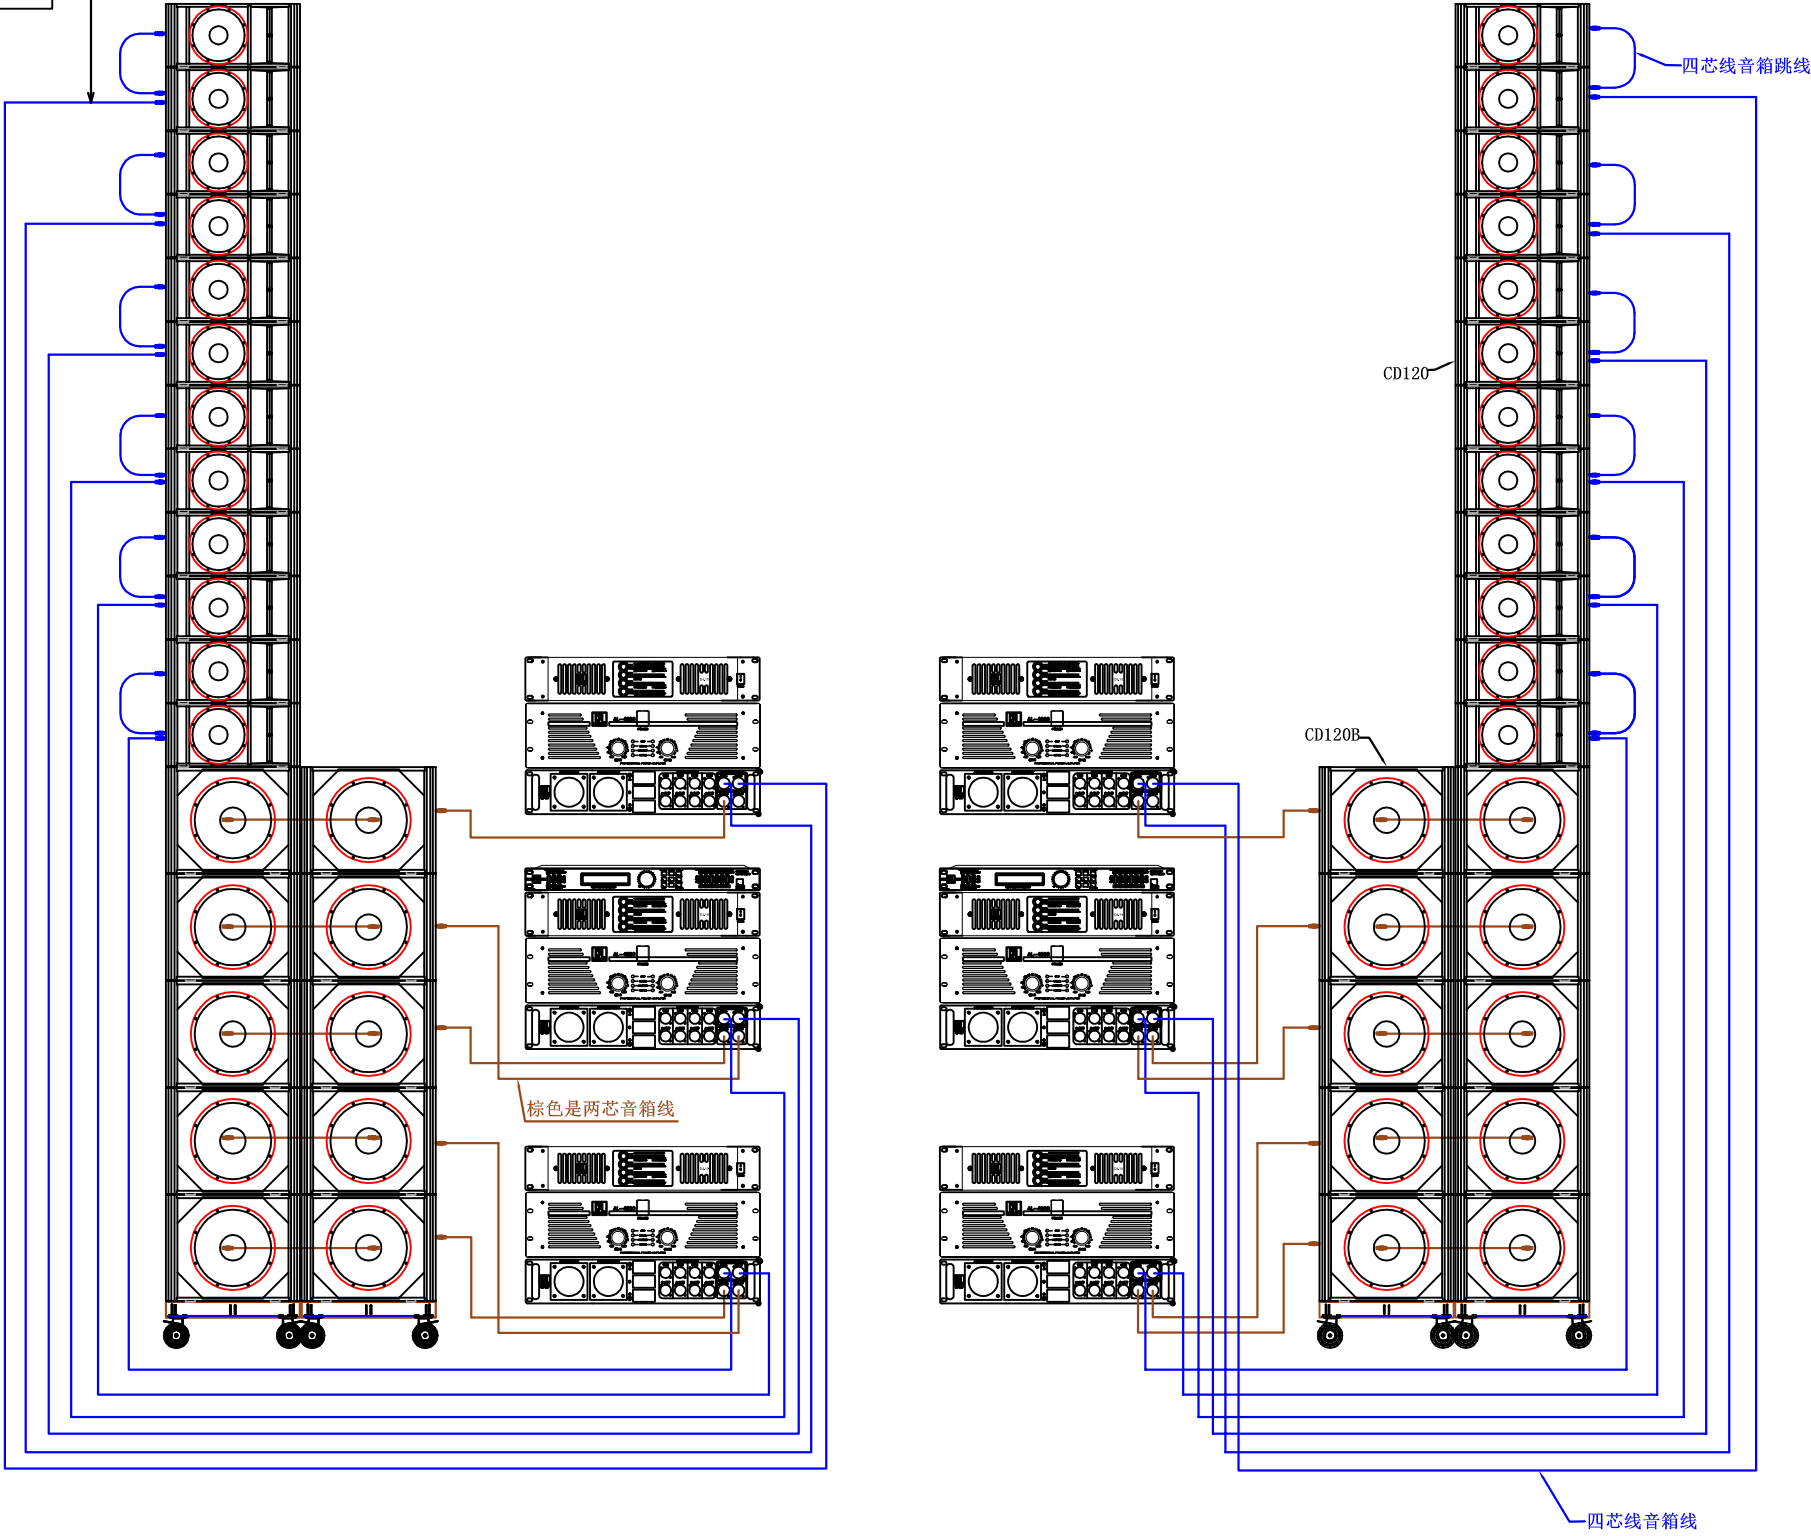

- 1、4. 15功放输入灵敏度:150V (35dB)
- 2、AL-4800功放输入灵敏度:0. 775V (180V)
- 3、处理器数据选择12+10B

CD120system processor (IN):  
A=L B=R C=SUB

CD120system processor (OUT):  
1=L-HF 2=L-LF 3=R-HF 4=R-LF 5=SUB 6=SUB

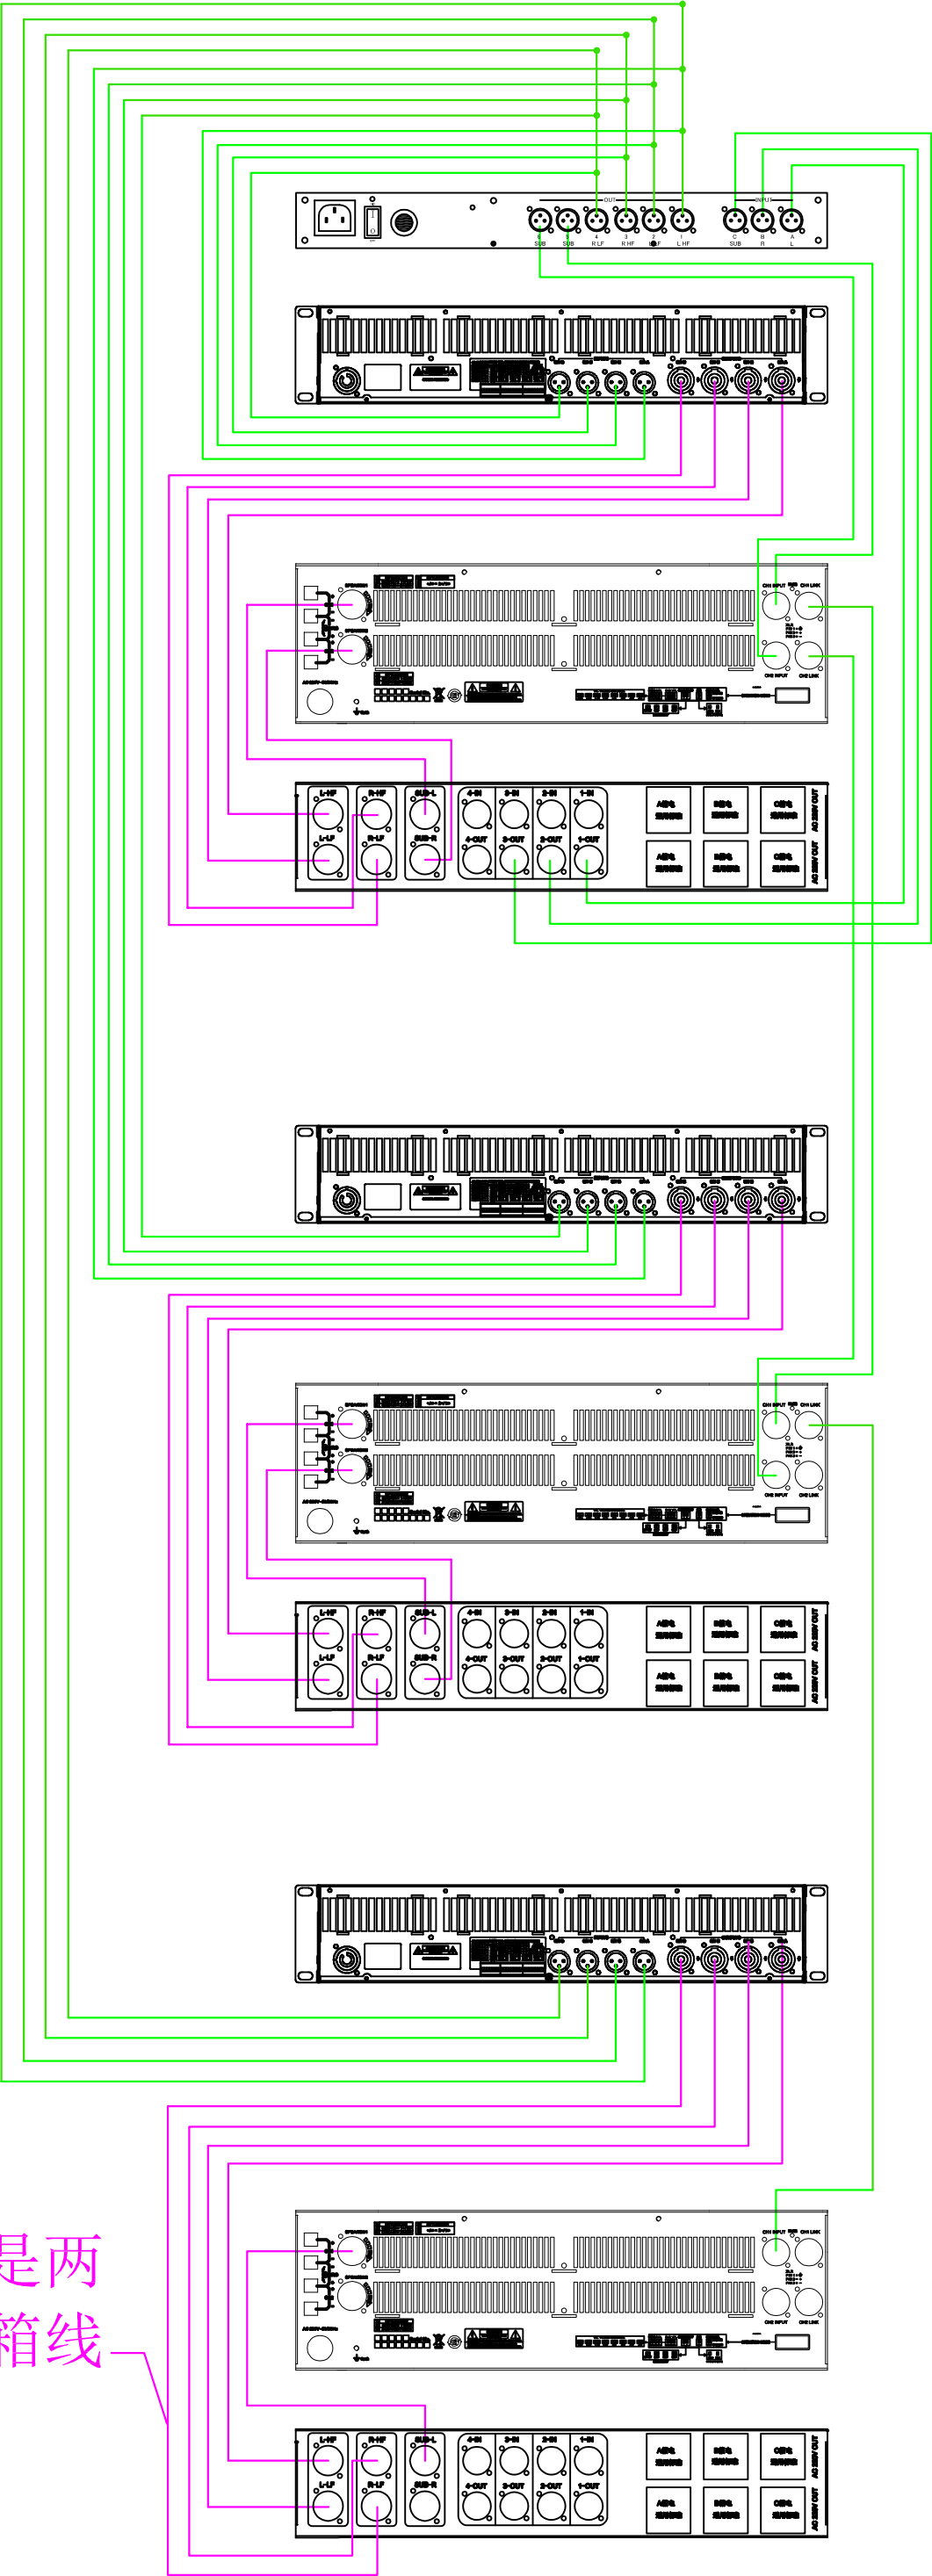

CD120system

D4.15

绿色线是信号线

AL-4800

AL-32B

D4.15

AL-4800

AL-32B

D4.15

AL-4800

AL-32B

粉红色是两  
芯音箱线